


# MAESTRO 5L PCB Separator




MAESTRO 5L is used most economically whenever large numbers of pre-scored PCBs need to be separated. The well-arranged control panel ensures easy operation. PCB panels with a maximum width of 310 mm can be separated by up to 10 circular blades simultaneously. Sensors are used to monitor the separation process. The PCBs are placed either by hand or they are fed automatically by a loading station. The machine can also be installed in an assembly line. The SMEMA interface is the standard connection for this use. The PCB Separator MAESTRO 5L can be adjusted to your PCB and your individual requirements. For PCB panel widths larger than 310 mm on request.

PCB thickness A	1.0 - 3.2 mm
Remaining PCB thickness B	typical 1/3 of Dim. A min. 0.3 mm max. 0.6 mm
Depth of scoring C	min. 0.3 mm
Increase in external dimensions after separation	0.1 - 0.2 mm
The pre-scored grooves can be interrupted by cutouts with a length of up to approx. 5 mm.	

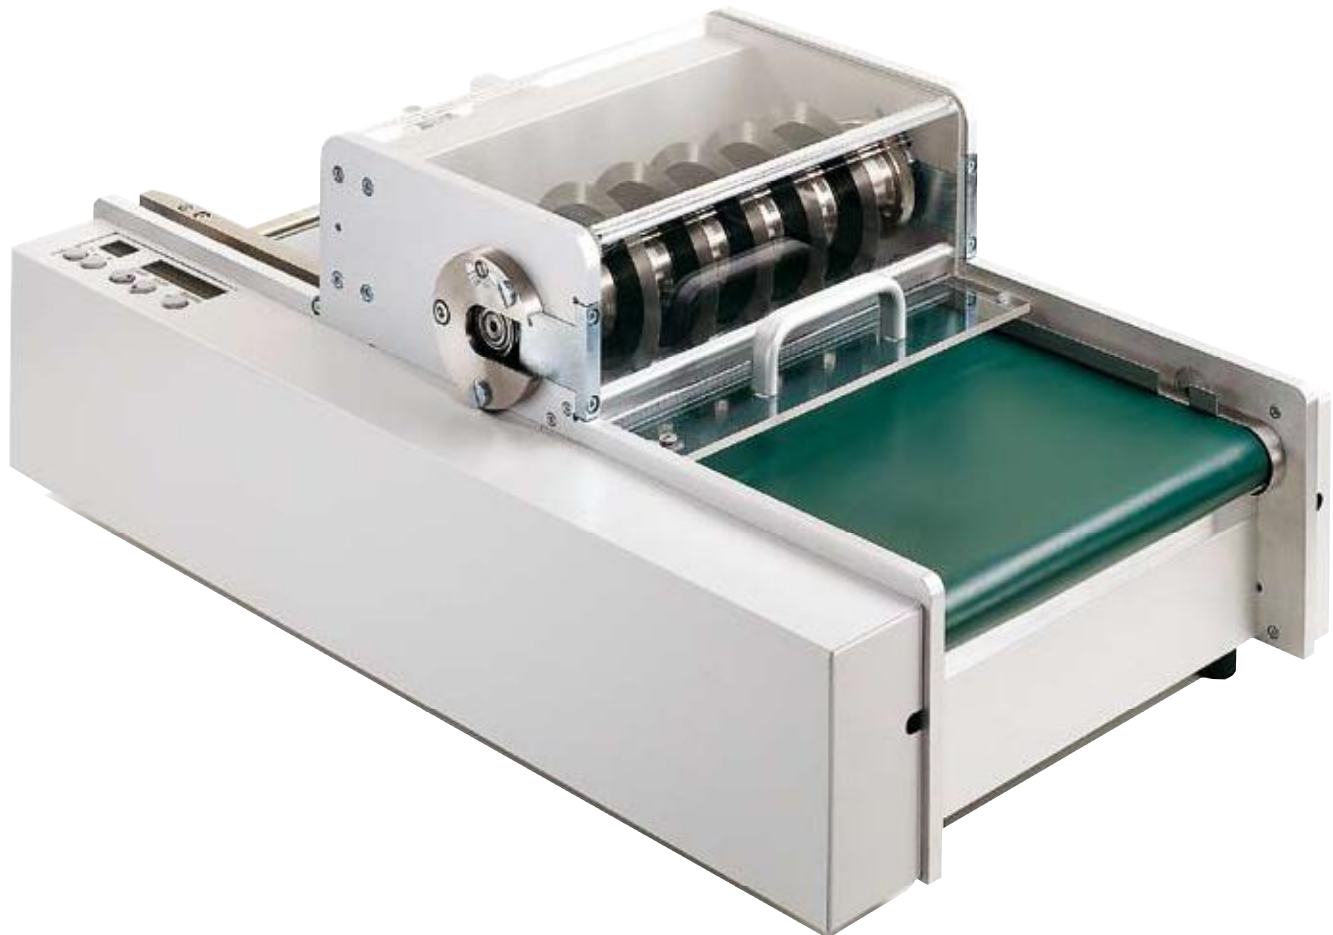

The machine is supplied with a height-adjustable base. In this way it can be adapted optimally to every requirement.

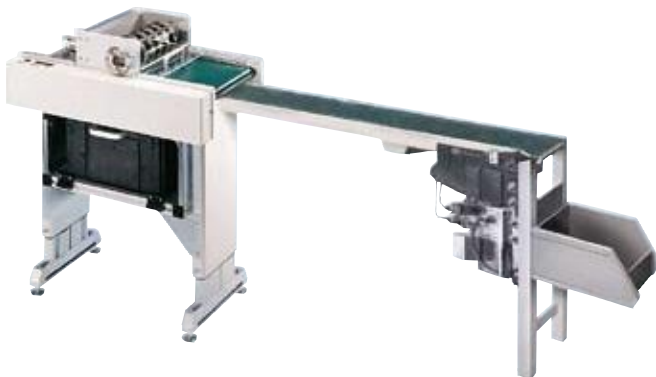

### MAESTRO 5L Customer-specific application

The separated PCBs are transported by the conveyor belt for further treatment. Workplaces are arranged on the right and on the left of the belt. The side strips drop down into a collecting box.



### Dust Extraction

The Dust Extractor can be switched on directly on the PCB Separator. More information: see page 11



Technical Data	
Separation type	Component side circular blade Solder side circular blade
Operation	motorized
Separation speed	100 - 220 mm/s in 10 steps
Length of PCB panel with light barrier activated with light barrier de-activated	100 - 270 mm > 100 mm
Width of PCB panels	max. 310 mm
Width off-cut	min. 3 mm
Height of components	Component max. 30 mm Solder side max. 10 mm
Number of circular blades	max. 10
Width of PCBs	10 - 290 mm
Display	- Separation speed - Separated length or numbers of PCB panels
Keys	- Start, stop, reverse - Setting of separated speed
Sensors	- Detection of separation length - Accumulation in front of and behind the blades - Stop the end of the conveyor belt
Interfaces	- Remote start/stop - SMEMA (round 14 pins)
Mains voltage	Dual voltage 230 /115 V~ 50 - 60 Hz
Operating temperature	10 - 35° C
Storage/transport temperature	-20 - 50° C
Humidity non-condensing	10 - 85%
Weight	63 kg
Dimensions with base	height 750 - 1000 mm width 440 mm dept 1100 mm

Part No.	Description	
8934520	PCB Separator MAESTRO 5L Contents of delivery: MAESTRO 5L with base Circular blades on customer request Service tools	
Part No.	Spare parts	PU
8931580	Circular blade width 8 mm	1