


sistema  
automatico di ali-  
mentazione  
componenti  
radiali nastrati per  
modello TP/R-PR

# AS1

automatic  
system for  
taped radial  
components for  
model TP/R-PR

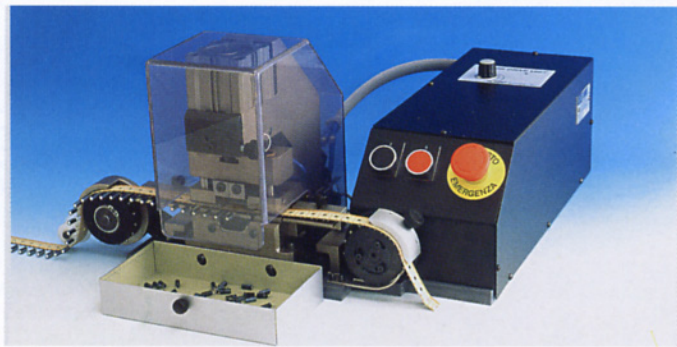

L'AS1 é un sistema automatico esclusiva-  
mente adattabile alla macchina TP/R-PR.  
Questa attrezzatura consente alla macchina  
TP/R-PR di raggiungere una maggiore pro-  
duzione. L'anello di trascinamento muove il

nastro "passo a passo" fermandolo durante  
l'operazione di preformatura. Può essere forni-  
to per adattare i due più comuni passi di  
nastratura e cioè 12,7 (Cod. 95.OL12 per 220)  
oppure 15 mm (Cod. 95.OL14 per 220V).

The AS1 is an automatic system that fits only  
the TP/R-PR machine. This equipment allows  
the machine to reach higher production. The  
driving wheel moves step by step stop-  
ping the tape during the preforming operation.  
It can be supplied to adapt the two  
most common hole pitches on the com-  
ponent tape : 12,7 (.5 inc.) (Code 95.OL11  
for 110V, 95.OL12 for 220V) and 15 mm (.59 inc.)  
(Code 95.OL13 for 110V and 95.OL14 for  
220V).

#### AS1

COMPLETO DI PIASTRA, ANELLI DI  
TRASCINAMENTO E SUPPORTO PER  
NASTRO IN BOBINA

COMPLETE WITH PLATE, DRIVING WHEELS  
AND SUPPORT FOR TAPE AND REEL.  
(Cod. 95.OL11 = 110V - 95.OL12 = 220V)

PRODUZIONE SU TP/R-PR = 7.000 p/h  
ALIMENTAZIONE = 220V - 50 Hz -100VA  
LUNG. = 50 cm  
LARGH. = 60 cm  
ALT. = 18 cm  
IMBALLO = 60x60x30 cm  
VOLUME = 0,108 m<sup>3</sup>  
PESO NETTO = 15 kg  
PESO LORDO = 18 kg

PRODUCTION ON TP/R-PR = 7000 p/h  
ELECT.SUPPLY = 220 or 110V - 50 Hz - 100 VA  
LENGTH = 50 cm  
WIDTH = 60 cm  
HEIGHT = 18 cm  
PACKING = 60x60x30 cm  
VOLUME = 0,108 m<sup>3</sup>  
NET WEIGHT = 15 kg  
GROSS WEIGHT = 18 kg